


RIDGELINE® FULL BRIM


SIGNATURE STYLE, PROVEN PROTECTION

Experience top-notch protection with the Ridgeline® Full Brim hard hat. Its durable ABS shell provides superior impact resistance and lightweight comfort, while the full brim design ensures maximum coverage from environmental hazards. The innovative adjustable, swinging ratchet suspension allows the hard hat to sit lower on the head for a more comfortable fit. The ratchet suspension offers effortless adjustment, fitting sizes 6.5 to 8 securely.

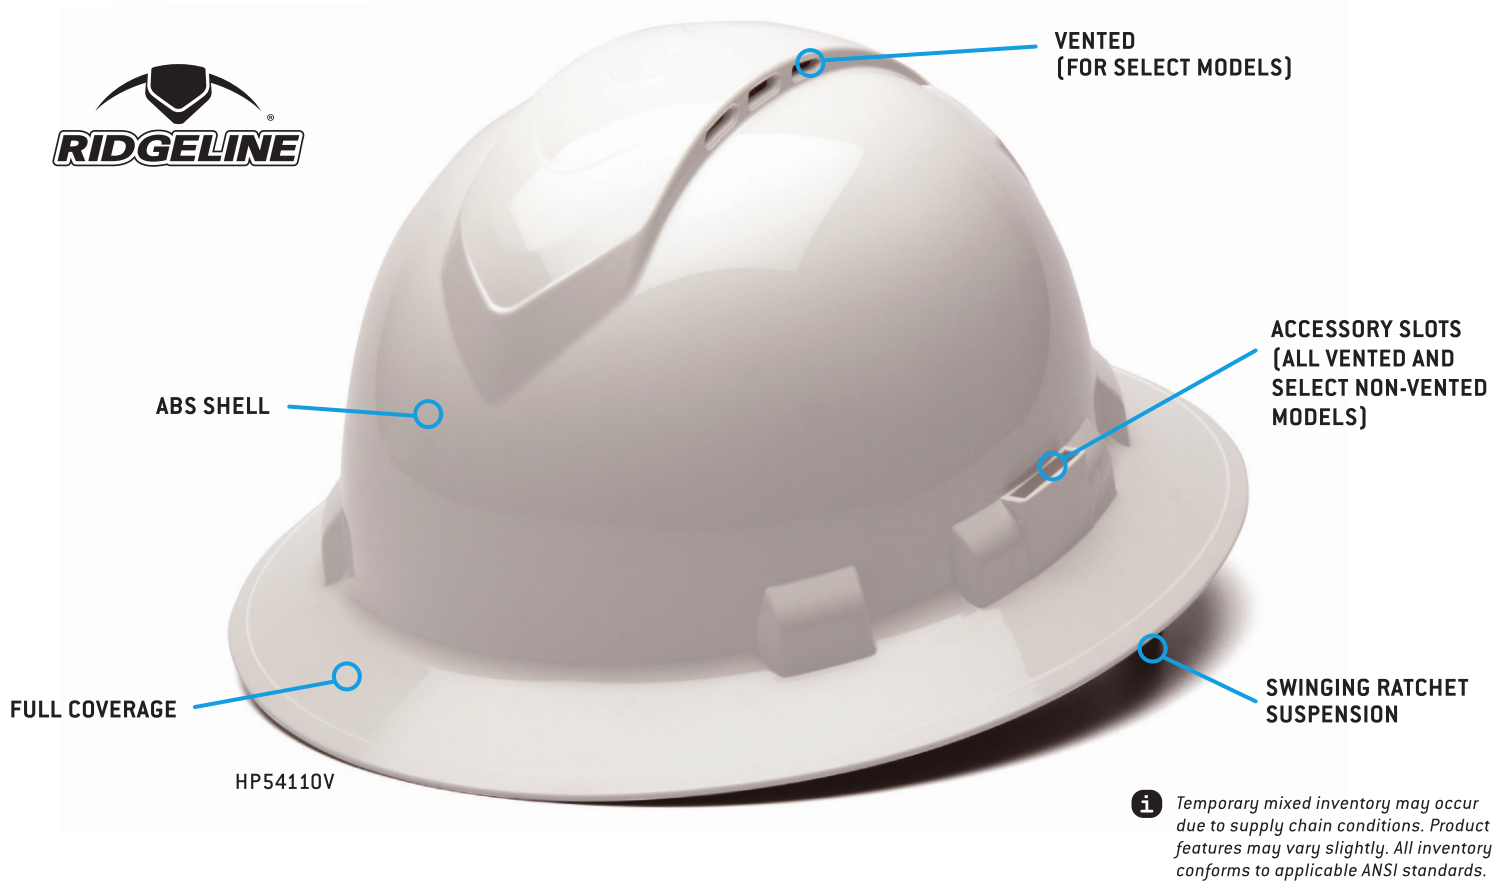

FEATURES

- Robust, Lightweight Shell:** ABS shell ensures durable, lightweight protection
- Complete Cover:** Full brim design ensures maximum protection from environmental hazards while enhancing comfort and visibility
- Accessory Compatibility (All Vented and Select Non-Vented Models):** Universal accessory slots to add additional protection
- Effortless Adjustment:** 4 or 6-point swinging ratchet suspension easily adjusts to provide a perfect fit across all head sizes
- Enhanced Ventilation (For Select Models):** Strategically placed vents improve airflow and reduce heat buildup, providing cooler wear during extended use
- Hygienic Solution:** Replaceable sweatband promotes cleanliness and comfort
- Engineered Toughness:** Meets ANSI/ISEA Z89.1-2014 Type I,  certified for CAN/CSA Z94.1-2015 Type I to ensure durability and confidence in performance

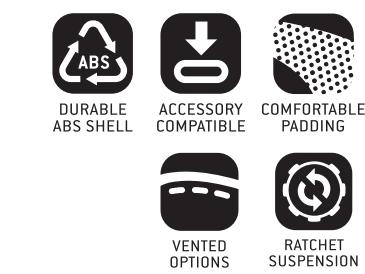

RIDGELINE® FULL BRIM

SIGNATURE STYLE, PROVEN PROTECTION

VARIATIONS

NON-VENTED		
4-Point Ratchet Suspension 20 Variations		
	HP54110	White
	HP54111	Black
	HP54112	Gray
	HP54113	Slate Gray
	HP54116	Matte White Graphite Pattern
	HP54116S	Shiny White Graphite Pattern
	HP54117	Matte Black Graphite Pattern
	HP54117S	Shiny Black Graphite Pattern
	HP54118	Matte Copper Graphite Pattern
	HP54120	Red
	HP54121	Matte Red Graphite Pattern
	HP54122	Matte Blue Graphite Pattern
	HP54123	Matte Silver Graphite Pattern
	HP54124	Matte Lime Graphite Pattern
	HP54130	Yellow
	HP54131	Hi-Vis Lime
	HP54135	Green
	HP54141	Hi-Vis Orange
	HP54160	Blue
	HP54170	Pink
6-Point Ratchet Suspension 5 Variations		
	HP56110	White
	HP56120	Red
	HP56130	Yellow
	HP56135	Green
	HP56160	Blue
VENTED		
4-Point Ratchet Suspension 9 Variations		
	HP54110V	White
	HP54111V	Black
	HP54113V	Slate Gray
	HP54117V	Matte Black Graphite Pattern
	HP54130V	Yellow
	HP54131V	Hi-Vis Lime
	HP54135V	Green
	HP54141V	Hi-Vis Orange
	HP54160V	Blue

MATERIALS


Shell: ABS (Acrylonitrile Butadiene Styrene) Plastic
Sweatband: Polyester + Polyurethane (PU) Foam
Suspension: HDPE (Polypropylene) + High Impact Nylon

 WARNING: Cancer and Reproductive Harm –P65Warnings.ca.gov

MARKINGS

Standard: ANSI/ISEA Z89.1-2014 + CAN/CSA Z94.1-2015
Type: Type I Full Brim Hard Hat
Class: Non-Vented – Class E (Electrical) Rated for 20,000 Volts, Vented – Class C (Conductive) Does Not Offer Electrical Protection – Class G (General) Rated for 2,200 Volts
LT: Low Temperatures Protection up to -22°F HT: High Temperatures Protection up to 140°F
HV: Meets All Requirements for High-Visibility (HP54131, HP54141, HP54131V, HP54141V)
Date Code: Indicates Month and Year Shell was Molded - Does Not Indicate Service Life.

Product markings may vary // Updated as of 06.26



i Temporary mixed inventory may occur due to supply chain conditions. Product features may vary slightly. All inventory conforms to applicable ANSI standards.

GENERAL SPECIFICATIONS

Weight: 378 gm
Shell Thickness: 1.7-4 mm
Dimensions: 31 x 27 x 15.2 cm
Suspension Adjust Sizing: 6.5 to 8
Suspension: Adjustable with Ratcheting Wheel

PRODUCT GUIDELINES

- Never alter or modify the shell or suspension system. Always use original replacement parts. Decals/stickers are acceptable if they do not affect a hard hat's protective rating or make it difficult to find damage.
- Inspect your hard hat shell and suspension on a regular basis. Check for cracks or faulty parts each time it is to be used. If you notice any sign of damage, the faulty part should be discarded and immediately replaced. Inspect the hard hat each time before use and replace immediately if there is any sign of damage.
- The service life of a hard hat begins when the hard hat is put into service. Maximum service life is 5 years for the shell and 1 year for the suspension, beginning immediately upon first use. If the hard hat has received a considerable strike, it should be replaced immediately, even if there is no visible damage. Only use genuine Pyramex accessories and replacement parts that have been approved for use with this helmet.
- Clean only with mild soap and lukewarm water. DO NOT USE paints, chemicals, gasoline, or similar substances on the hard hat. If these substances are applied on the shell, its impact resistance and other features could be decreased and could be dangerous for the user.
- Store hard hat in a cool place out of direct sunlight. Do not store in vehicles where the interior temperature can become extreme and cause deterioration of the hard hat.